

# Access controller with an **Eye**



Touch and call



Receives live View  
and two way audio



Unlock remotely  
from anywhere




## All-in-One Door Access Controller

- 2MP super low lux CMOS camera
- Provides 180° panorama view
- Intelligent IR
- Built-in Mic and Speaker
- Built-in micro SD card slot (SD/SDHC) for local storage
- Touch Doorbell Button
- Access control function
- Ingress protection (IP66)
- DC 12V / PoE (IEEE 802.3at)


## Application



## Structure

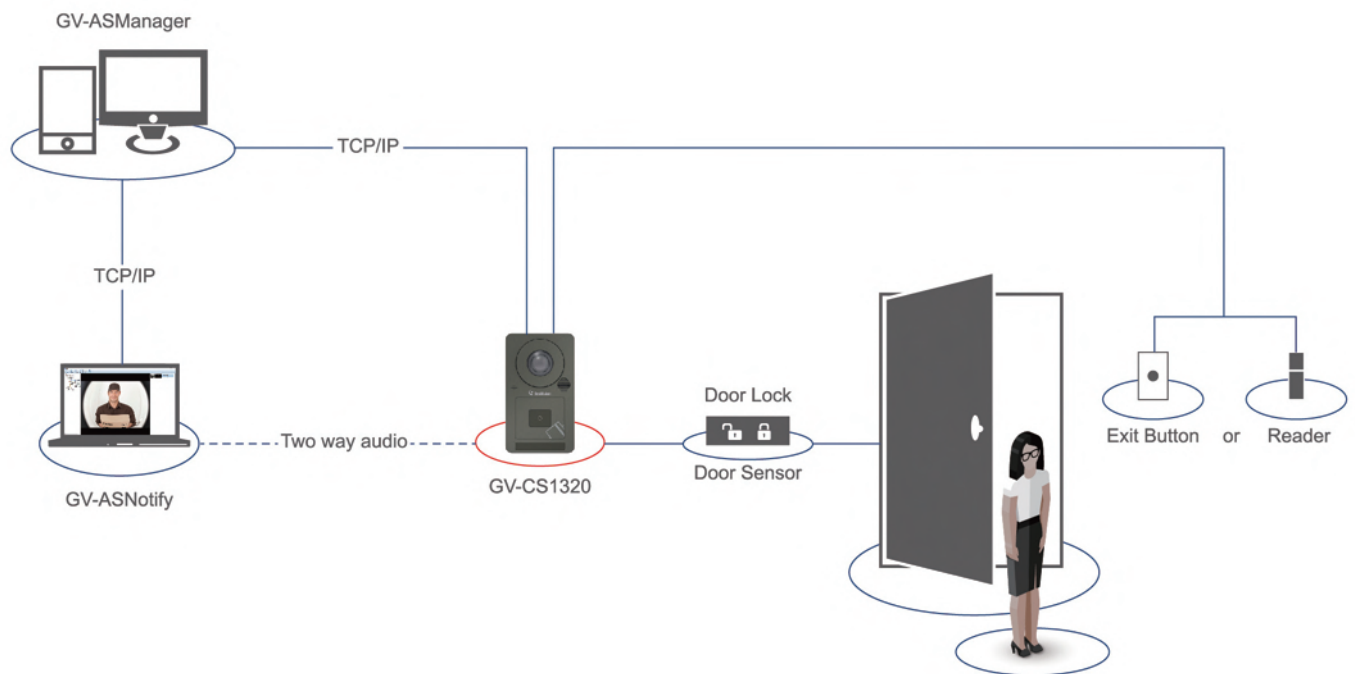

Our CS1320 provides entry level security, communication, and the option to start small and expand later. Select the ideal product solution for your building application.

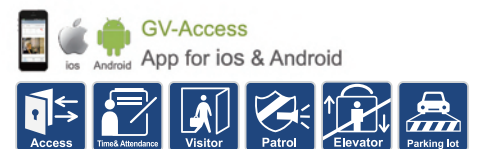

## Overview



GV-CS1320 is a new single entrance access controller with a built-in 2MP wide angle lens. It is also a 13.56 MHz reader.

It provides both a sensor and an exit button for door access control system. You can connect up to two readers to GV-CS1320 for entry and exit applications. With the capability to store up to 40,000 cards, the card reader recognizes identification cards and grants access accordingly. It has TCP/IP communication interface to PC.

Programming of GV-CS1320 can be done from the software GV-ASManager through the RS-485 connection. Its built-in camera captures all angles of the entrance and transmits live view to GV-ASManager and GV-System through network.